

ZHENYANG LIGHTING TECHNOLOGY CO.,LTD

SPECIFICATION

Product Name: LED Canopy Light-1



**ADVANTAGE:**

- ◆ Come in 4 Versions 80W, 100W, 120W, 150W
- ◆ Philips LED with Inventronic Driver
- ◆ Die-cast aluminum housing, polyester powder painted finish,
- ◆ Corrosion resistant, 5 Years Warranty
- ◆ Air convection cooling, free of dirt accumulation,
- ◆ Greatly extend the luminaire lifetime.
- ◆ Tempered glass lens, secured with stainless steel fasteners
- ◆ Suspended/Surface/Hook installation method


APPLICATION:

Petrol station, canopy, airport, train station, lobby, industry, shopping mall and indoor parking

TECHNICAL DATA SHEET**Product Specifications**

Electrical Parameters	Input Voltage	AC90-265V	CCT	2700-6500K
	Material	Die-cast aluminum	Driver	Inventronics
	LED Type	Philips	Lamp Initial Flux	120 lm/W
	Working Life	50000 hours	Power Factor	>0.95
	CRI	> 80	Beam Angel	110°
	IP Grade	IP65	Operating Temperature	-40°C ~45°C
Model	LED Power	LED Quantity (PCS)	Product Size (MM)	Product Weight (KG)
ZY-CL80-1	80W	80	400*400	5.30
ZY-CL120-1	120W	120	400*400	5.46
ZY-CL150-1	150W	150	400*400	5.66
ZY-CL200-1	200W	200	400*400	5.86

100W Luminous Intensity Distribution Diagram

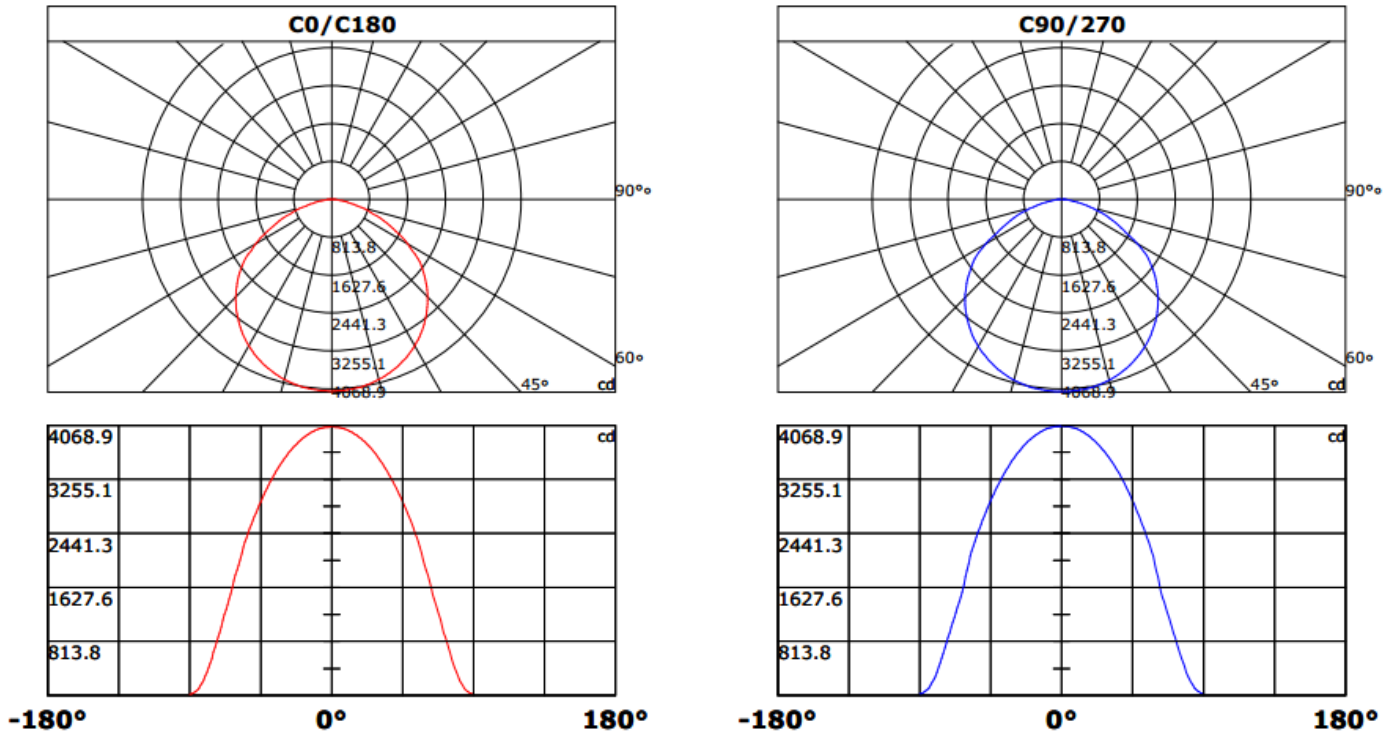

PACKAGE

Model	Carton Packing			
	Net Weight of Carton(KG)	Gross Weight of Carton(KG)	Size of Carton (MM)	Box PCS /Carton
ZY-CL80-1	5.30	6.0	465*465*160	1PC/CTN
ZY-CL120-1	5.46	6.1	465*465*160	1PC/CTN
ZY-CL150-1	5.66	6.3	465*465*160	1PC/CTN
ZY-CL200-1	5.86	6.5	465*465*160	1PC/CTN