


ZHENYANG LIGHTING TECHNOLOGY CO.,LTD

SPECIFICATION

Product Name: LED Down Light-1



**ADVANTAGE:**

- ◆ Nano plastics ,high temperature resistant,Good flame retardant,insulation material,Environmental protection,
- ◆ Economy lights
- ◆ Nano plastics come with aluminum inside.Better Heat dissipation.
- ◆ Aluminum reflector-improve the heat dissipation,light facula evenly
- ◆ Big terminal,easy connect,high quality

APPLICATION:

Used in factory,banks,hotel,stores,commercial buildings,shopping malls,supermarket,undergroud,garage&etc


TECHNICAL DATA SHEET

Product Specifications

Electrical Parameters	Input Voltage	AC220-240V	CCT	2700-6500K
	Material	mano-plastic and aluminum	Driver	Own brand
	LED Type	Epistar	Lamp Initial Flux	90lm/W
	Working Life	50000 hours	Power Factor	>0.95
	CRI	> 80	Beam Angel	100°
	IP Grade	IP20	Operating Temperature	-20°C ~45°C
Model	LED Power	Product Size (MM)	Cut out (MM)	Product Weight (KG)
ZY-DL10-1	10W	108*67	φ90	0.3

Luminous Intensity Distribution Diagram

10W

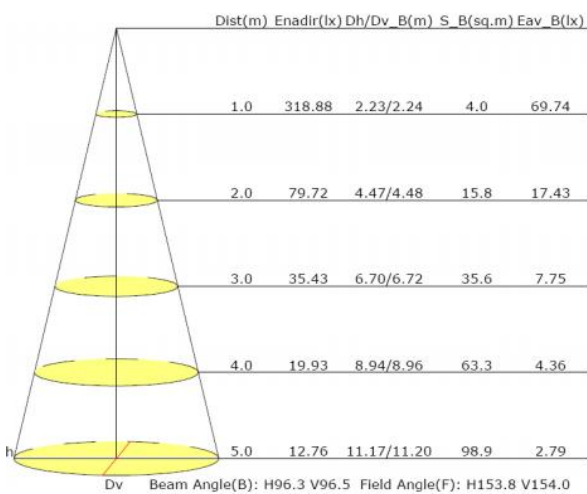

Luminous Intensity Distribution Curve

