

ZHENYANG LIGHTING TECHNOLOGY CO.,LTD

SPECIFICATION

Product Name: LED Tube Light

Product Model: ZY- TL18



**ADVANTAGE:**

- ◆ High Brightness 2835 LED
- ◆ Isolated power supply with high efficiency constant current driver
- ◆ High quality diffusion cover/ clear cover, soft lighting, high rate lighting, efficiency comprehensive than traditional fluorescent tubes
- ◆ Green environmental protection, no ultraviolet, infrared, thermal radiation and mercury pollution


APPLICATION:

Widely used in hotels, bars, shopping malls, corridor restroom, museum, exhibition hall, the gatehouse signs, warehouse, home interior lighting, atmosphere etc


TECHNICAL DATA SHEET

Product Parameters	
Model	ZY- TL18
Input Voltage	AC100-240V
Operating Frequency	50-60HZ
Power Factor	≥0.9
Power Efficiency	≥88%
Power	18W
luminous flux	Milky Cover 1800LM
Color Temperature	3000K-6500K
CRI	≥80
LEDs QTY	96pcs
Beam Angle	120°
Operating Temperature	-20°C~45°C
Service Life	>30000 Hrs

Luminous Intensity Distribution Diagram

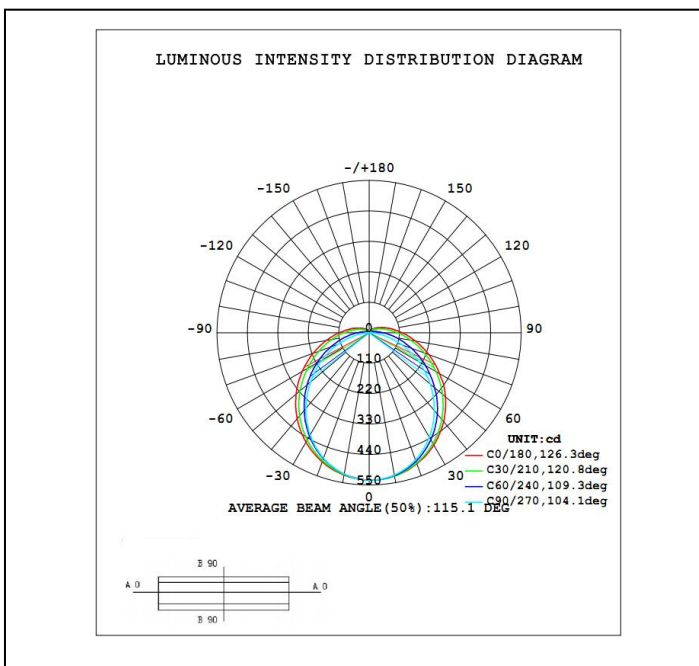

AAI Figure

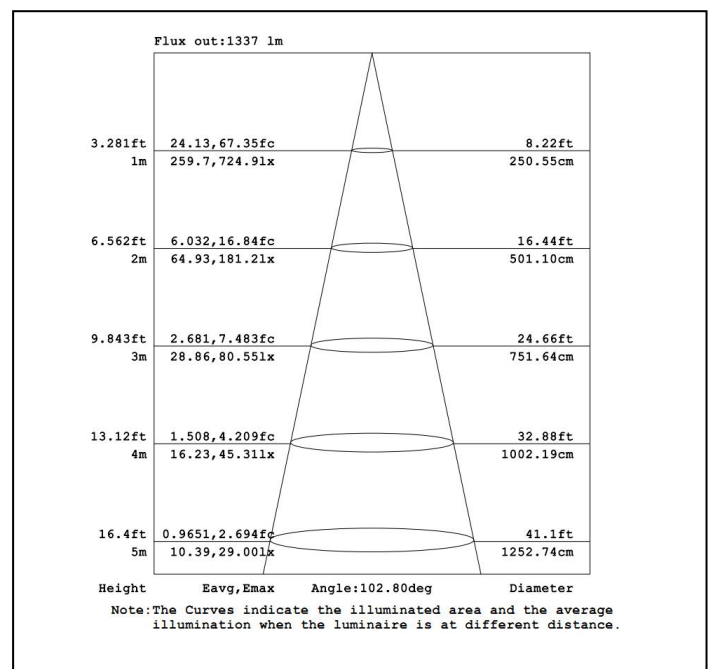

PACKAGE

Tube Packaged Figure




1

©Use PE bag first, then use cylinder packaged. GW: xxKG




2

©Carton: 20pcs/CTN

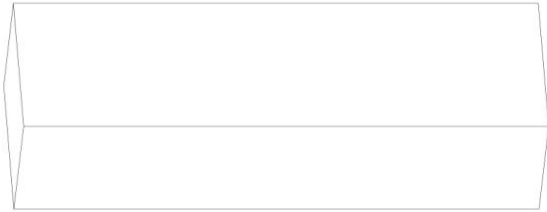

3

©Carton Size: 1260*200*165mm GW: xx KG

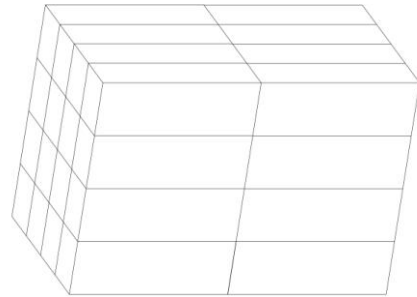

4

©Batched Measurement: xxx*xxx*xxxmm GW: XXkg

Carton Packaged Figure




1

©Use PE bag first, then use cylinder packaged. GW: xxKG




2

©Carton: 25pcs/CTN

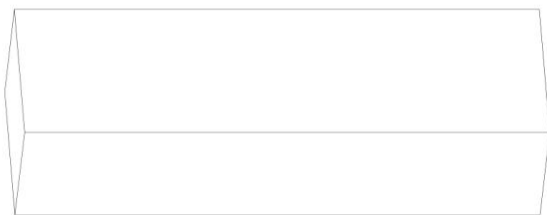

3

©Carton Size :1240*175*175mm GW: xx KG

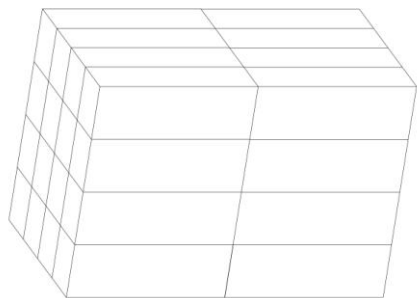

4

©Batched Measurement: xxx*xxx*xxxmm GW: XXkg