

# ZHENYANG LIGHTING TECHNOLOGY CO.,LTD

---

## SPECIFICATION

Product Name: LED FLOOD Light-2

---



**ADVANTAGE:**

- ◆ 100-120lm/w
- ◆ IP65 Waterproof grate
- ◆ Epistar with LM80 test pasted
- ◆ PCCOOLER Suppliers Aluminum Alloy,ASA
- ◆ Resistor prevents short circuit and oxidation
- ◆ Long life span, can be used for more than 5 years in normal environment


**APPLICATION:**

- ◆ Warehouse, factory and workshops;
- ◆ Sports fields, Airport, Large Construction sites, ;
- ◆ Exhibition hall, Golf courts, Gymnasium and supermarkets, etc.

**TECHNICAL DATA SHEET****Product Specifications**

Electrical Parameters	Input Voltage	AC85-277V	CCT	2700-6500K
	Material	Aluminum alloy/ASA	Driver	Zhihe
	LED Type	Epistar	Lamp Initial Flux	100-110 lm/W
	Working Life	50000 hours	Power Factor	>0.95
	CRI	> 80	Beam Angel	120°
	IP Grade	IP65	Operating Temperature	-30°C ~60°C
Model	LED Power	LED Quantity (PCS)	Product Size (MM)	Product Weight (KG)
ZY-FL10-2	10W	24	166*116*32	0.46
ZY-FL20-2	20W	48	216.5*161*40	0.85
ZY-FL30-2	30W	60	226.5*176*40	0.96
ZY-FL50-2	50W	108	310*229*47.5	1.85
ZY-FL80-2	80W	144	354.5*245*49.5	3.15
ZY-FL100-2	100W	204	402*304*53.5	4
ZY-F150-2	150W	300	430*339*53.5	5.3
ZY-FL200-2	200W	408	470*360*60	6.1

### 100W Luminous Intensity Distribution Diagram

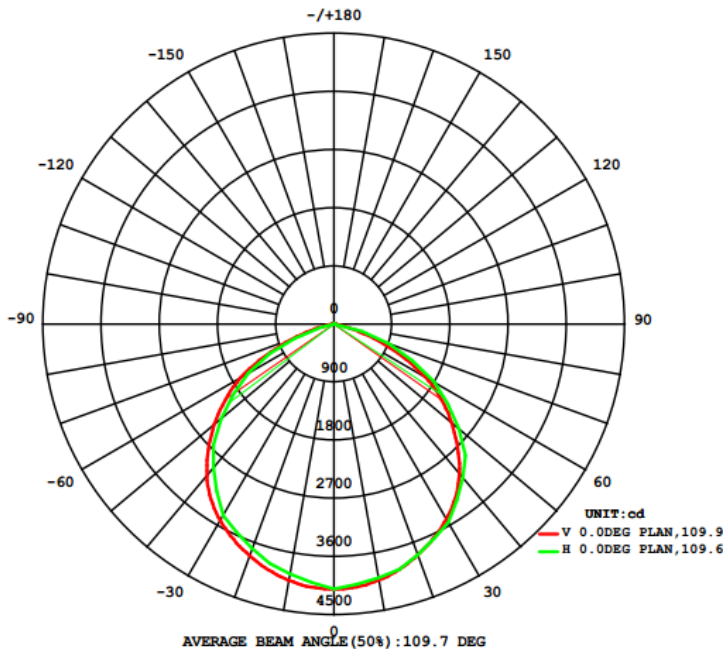

### PACKAGE

Model	Carton Packing			
	Net Weight of Carton(KG)	Gross Weight of Carton(KG)	Size of Carton (MM)	Box PCS /Carton
ZY-FL10-2	16.56	20	425*415*255	36
ZY-FL20-2	17	20	515*380*260	20
ZY-FL30-2	19.2	22	535*405*260	20
ZY-FL50-2	14.8	18	530*365*255	8
ZY-FL80-2	3.15	4	435*340*130	1
ZY-FL100-2	4	5.4	480*390*135	1
ZY-FL150-2	5.3	6.5	510*430*135	1
ZY-FL200-2	6.1	7.5	555*460*135	1