

ZHENYANG LIGHTING TECHNOLOGY CO.,LTD

SPECIFICATION

Product Name: LED PIR FLOOD Light





ADVANTAGE:

- ◆ >110-140m/w
- ◆ Infrared sensor 120°,8-10M
- ◆ Epistar or Philips 3030 Import LED
- ◆ Zhihe or Sosen or Meanwell driver
- ◆ Die -casting aluminum housing
- ◆ Lens reflector improves light efficiency
- ◆ SUS304 Stainless steel screw
- ◆ IP66 Waterproof grade
- ◆ 5 years warranty


APPLICATION:

- ◆ Warehouse, factory and workshops;
- ◆ Sports fields, Airport, Large Construction sites,;
- ◆ Exhibition hall, Golf courts, Gymnasium and supermarkets, etc.

TECHNICAL DATA SHEET**Product Specifications**

Electrical Parameters	Input Voltage	AC100-277V	CCT	2700-6500K
	Material	Aluminum Alloy	Driver	Zhihe or Sosen or Meanwell
	LED Type	Epistar Or Philips	Lamp Initial Flux	110-140 lm/W
	Working Life	50000 hours	Power Factor	>0.95
	CRI	> 80	Beam Angel	120°
	Sensor	Infrared Sensor	Inductive Distance	8-10M
	IP Grade	IP66	Operating Temperature	-30°C ~45°C
Model	LED Power	LED Quantity	Product Size (MM)	Product Weight (KG)
ZY-FL10-P	10W	12pcs	129*99*44	0.52
ZY-FL20-P	20W	25pcs	175*135*44	0.90
ZY-FL30-P	30W	40pcs	215*175*47	1.3
ZY-FL50-P	50W	70pcs	275*225*48	2.1
ZY-FL100-P	100W	140pcs	325*275*53	3.5
ZY-F150-P	150W	210pcs	385*305*58	4.7

100W Luminous Intensity Distribution Diagram

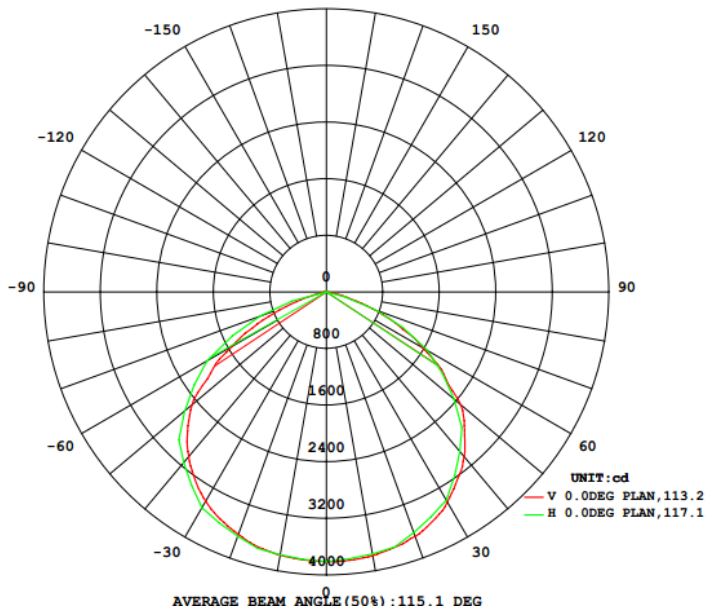

PACKAGE

Model	Carton Packing			
	Net Weight of Carton(KG)	Gross Weight of Carton(KG)	Size of Carton (MM)	Box PCS /Carton
ZY-FL10-P	15.6	17.5	570*375*175	30PCS
ZY-FL20-P	18	19	600*335*215	20PCS
ZY-FL30-P	19.5	20.5	620*330*250	15PCS
ZY-FL50-P	21	22	525*370*315	10PCS
ZY-FL100-P	17.5	18.5	38*31.5*39	5PCS
ZY-FL150-P	18.8	20	350*320*450	4PCS